

Rosemount 205 MultiVariable™ Sensor Module

THE PROVEN LEADER IN MULTIVARIABLE MEASUREMENT

- *Differential pressure measurement accuracy of $\pm 0.075\%$ of span*
- *Static pressure measurement accuracy of $\pm 0.075\%$ of span*
- *Process temperature measurement accuracy of ± 1.0 °F (0,56 °C)*
- *SPI based communication through ribbon cable interface*
- *Small, Lightweight, Coplanar™ design*



Contents

Ordering Information	page 2
Specifications	page 4
Dimensional Drawings.....	page 6

Rosemount 205

Ordering Information

Table 1. Rosemount 205 MultiVariable Sensor Module

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery.
The Expanded offering is subject to additional delivery lead time.

Model	Product Description	
0205	Rosemount 205	
Performance		
Standard		Standard
E	MultiVariable Sensor Module (0.1% DP Accuracy)	★
P	MultiVariable Sensor Module (0.075% DP Accuracy)	★
Differential Pressure Range		
Standard		Standard
1 ⁽¹⁾	0-0.5 to 0-25 inH ₂ O (0-1,25 to 0-62,2 mbar)	★
2	0-25 to 0-250 inH ₂ O (0-6,23 to 0-623 mbar)	★
3	0-10 to 0-1000 inH ₂ O (0-0,0249 to 0-2,49 bar)	★
Static Pressure Range		
Standard		Standard
3	0.5-8 to 0.5-800 psia (3,447-55,16 to 3,447-5516 kPa)	★
4	0.5-36.26 to 0.5-3,626 psia (3,447-250 to 3,447-25000 kPa)	★
C	0-8 to 0-800 psig (0-55,16 to 0-5516 kPa)	★
D	0-36.26 to 0-3,626 psig (0-250 to 0-25000 kPa)	★
Isolator Material/Fill Fluid		
Standard		Standard
A ⁽²⁾	316L SST, Silicone	★
B ⁽²⁾	Alloy C-276, Silicone	★
J ⁽²⁾⁽³⁾	316L SST, Inert	★
K ⁽²⁾⁽³⁾	Alloy C-276, Inert	★
Flange Style, Material		
Standard		Standard
A	Coplanar, Carbon Steel	★
B	Coplanar, SST	★
C	Coplanar, Cast C-276	★
E	Coplanar, Carbon Steel, Non-Vented	★
F	Coplanar, SST, Non-Vented	★
J	Traditional, SST, 7/16-20 Bolting	★
0	None (Required for S5 option)	★
Drain/Vent Material		
Standard		Standard
A	SST	★
C	Alloy C-276	★
0	None (Required for S5 option)	★
O-Rings (Wetted)		
Standard		Standard
1	Glass-filled PTFE	★

Product Data Sheet

00813-0100-4205, Rev BB

June 2011

Rosemount 205

Table 1. Rosemount 205 MultiVariable Sensor Module

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery. The Expanded offering is subject to additional delivery lead time.

Process Temperature Input		
Standard		Standard
N	None (No Cable, No Boss)	★
0	Fixed Process Temperature (No Cable)	★
1	RTD Input with 12 ft (3,66 m) Shielded Cable	★
2	RTD Input with 24 ft (7,32 m) Shielded Cable	★
3	RTD Input with 12 ft (3,66 m) Armored, Shielded Cable	★
4	RTD Input with 24 ft (7,32 m) Armored, Shielded Cable	★
Mounting Bracket		
Standard		Standard
0	None	★
1	Coplanar SST, 2" Pipe or Panel, SST Bolts	★
Bolting Material		
Standard		Standard
0	Carbon Steel	★
1	Austenitic 316 SST	★
N	None	★

Options (Include with selected model number)

Flange Adapters		
Standard		Standard
DF	Flange Adapters - Adapter Type Determined by Selected Flange Material	★
Integral Manifold		
Standard		Standard
S5 ⁽⁴⁾	Assemble to 305 Integral Manifold	★
Cleaning		
Standard		Standard
P2	Special Process Cleaning	★
Material Traceability Certification		
Standard		Standard
Q8	Material Traceability	★

(1) Available only with Static Pressure Ranges 3 and C with Isolator Material/Fill Fluid option code A (316L SST, Silicon).

(2) Materials of Construction comply with metallurgical requirements highlighted within NACE MR0175/ISO 15156 for sour oil field production environments. Environmental limits apply to certain materials. Consult latest standard for details. Selected materials also conform to NACE MR0103 for sour refining environments.

(3) Only available with Gage Sensor, Static Pressure Range codes C and D.

(4) "Assemble-to" items are specified separately and require a completed model number.

Specifications

FUNCTIONAL

Service

Gas, liquid, or steam

Differential Sensor

Limits

- Range 1: -25 to 25 inH₂O (-62,2 to 62,2 mbar)
- Range 2: -250 to 250 inH₂O (-623 to 623 mbar)
- Range 3: -1000 to 1000 inH₂O (-2,49 to 2,49 bar)

Absolute Sensor

Limits

- Range 3: 0.5 to 800 psia (3,447 to 5516 kPa)
- Range 4: 0.5 to 3,626 psia (3,447 to 25000 kPa)

Gage Sensor

Limits

- Range C: 0 to 800 psig (0 to 5516 kPa)
- Range D: 0 to 3,626 psig (0 to 25000 kPa)

Calibration

All sensor modules are shipped with 0 to URL trim points.

Overpressure Limit

0.5 psia (3,447 kPa) to two times the static pressure sensor range with a maximum of 3,626 psia (25000 kPa) for differential pressure ranges 2-3 and 2000 psia (13790 kPa) for differential pressure range 1.

Static Pressure Limit

Operates within specifications between static line pressures of 0.5 psia (3,447 kPa) and the URL of the absolute pressure sensor.

Temperature Limits

Process (at transmitter isolator flange for atmospheric pressures and above)

- Silicone fill: -40 to 250 °F (-40 to 121 °C)
- Inert fill: 0 to 185 °F (-18 to 85 °C) (Process temperature above 185 °F (85 °C) require derating the ambient limits by a 1.5:1 ratio.)

Ambient:

- Silicon fill: -40 to 185 °F (-40 to 85 °C)
- Inert fill: 0 to 185 °F (-18 to 85 °C)

Storage:

- -40 to 230 °F (-40 to 110 °C)

Data Storage

- Sensor module data is stored in non-volatile EEPROM memory.
- Sensor module characterization data is an integral part of the sensor module.

PERFORMANCE

The sensor module performance shall meet the following performance criteria as a minimum. Maximum working pressure of the unit shall be the URL of the absolute sensor.

Specification Conformance

The Rosemount 205 maintains a specification conformance of measured variables to at least 3σ .

Zero Stability

Rosemount 205P

DP Range 2-3

- $\pm 0.1\%$ of URL for 12 months at reference conditions

DP Range 1

- $\pm 0.2\%$ of URL for 12 months at reference conditions

AP/GP

- $\pm 0.1\%$ of URL for 12 months at reference conditions

RTD

- ± 1.0 °F (0.56 °C) for 12 months at reference conditions

Vibration Effect

Rosemount 205P sensor outputs shall not shift more than $\pm 0.1\%$ of upper range limit per g from 5 to 2000 Hz in any axis when tested per IEC 770, Section 6.2.14.

Differential Pressure (DP)

Range 1

- 0-0.5 to 0-25 inH₂O (0-1,25 to 0-62,2 mbar)

Range 2

- 0-2.5 to 0-250 inH₂O (0-6,23 to 0-623 mbar)

Range 3

- 0-10 to 0-1000 inH₂O (0-0,0249 to 0-2,49 bar)

Reference Accuracy (including Linearity, Hysteresis, Repeatability)

Rosemount 205P

- $\pm 0.075\%$ of span for spans from 1:1 to 10:1 of URL.
- For spans less than 10:1 of URL,

$$\text{Accuracy} = \pm \left[0.025 + 0.005 \left(\frac{URL}{Span} \right) \right] \% \text{ of Span}$$

Rosemount 205E

- $\pm 0.10\%$ of span

Absolute/Gage Pressure (AP/GP)

Absolute

Range 3

- 0.5-8 to 0.5-800 psia (3,447-55,16 to 3,447-5516 kPa)

Range 4

- 0.5-36.26 to 0.5-3,626 psia (3,447-250 to 3,447-25000 kPa)

Gage

Range C

- 0-8 to 0-800 psig (0-55,16 to 0-5516 kPa)

Range D

- 0-36.26 to 0-3,626 psig (0-250 to 0-25000 kPa)

Product Data Sheet

00813-0100-4205, Rev BB

June 2011

Rosemount 205

Reference Accuracy (including Linearity, Hysteresis, Repeatability)

Rosemount 205P

- ±0.075% of span for spans from 1:1 to 10:1 of URL.
- For spans less than 10:1 of URL,

$$\text{Accuracy} = \pm \left[0.03 + 0.0075 \left(\frac{URL}{Span} \right) \right] \% \text{ of Span}$$

Rosemount 205E

- ± 0.10% of span

Process Temperature

Specification for process temperature is for the Rosemount 205 only. Sensor errors caused by the RTD are not included.

- ±1.0 °F (0.56 °C) for process temperatures from -300 to 1200 °F (-184 to 649 °C)
- For process temperatures above 1200 °F (649 °C), add ±1.0 °F (0.56 °C) per 100 °F (38 °C)

PHYSICAL

Process Connections

Coplanar Process Connection: 1/4-18 NPT on 2 1/8-in. centers
1/2-14 NPT on 2-, 2 1/8-, or 2 1/4-in. centers with optional flange adapters

Process Wetted Parts

Isolating Diaphragms

- 316L SST or Alloy C-276. CF-8M (last version of 316 SST, material per ASTM-A743)

Drain/Vent Valves

- 316 SST or Alloy C-276

Flanges

- Plated carbon steel, 316 SST, or Cast C-276

Wetted O-rings

- Glass-Filled PTFE

Non-Wetted Parts

Bolts

- Plated carbon steel per ASTM A449, Grade 5 or austenitic 316 SST


Fill Fluid

- Silicone

Weight

Component	Weight in lb (kg)
Rosemount 205 Sensor Module	3.4 (1.5)
SST Mounting Bracket	1.0 (0.4)
12 ft (3.66 m) RTD Shielded Cable	0.5 (0.2)
12 ft (3.66 m) RTD Armored Cable	1.1 (0.5)
24 ft (7.32 m) RTD Shielded Cable	1.0 (0.4)
24 ft (7.32 m) RTD Armored Cable	2.2 (1.0)

Dimensional Drawings

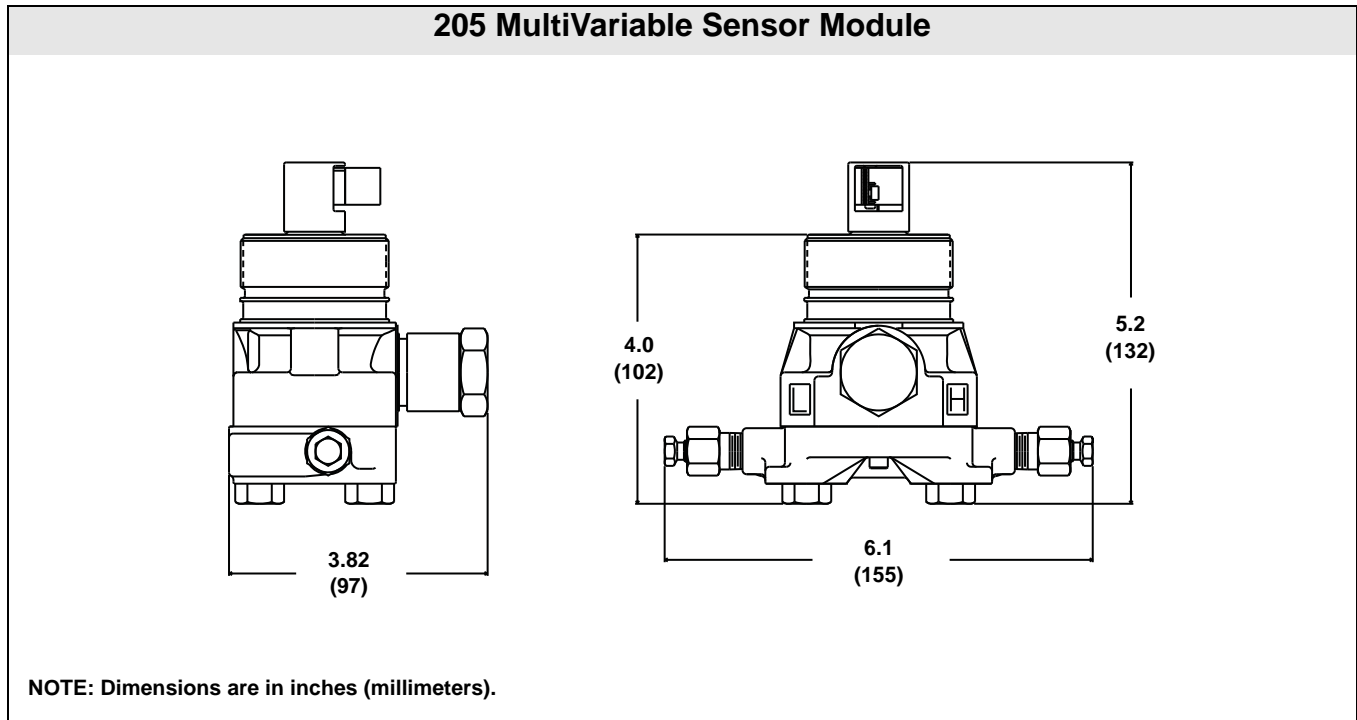

*Standard Terms and Conditions of Sale can be found at www.rosemount.com/terms_of_sale
The Emerson logo is a trade mark and service mark of Emerson Electric Co.
Rosemount, Coplanar, MultiVariable, and the Rosemount logotype are registered trademarks of Rosemount Inc.*

**Emerson Process Management
Rosemount Measurement**
8200 Market Boulevard
Chanhassen MN 55317 USA
Tel (USA) 1 800 999 9307
Tel (International) +1 952 906 8888
Fax +1 952 906 8889

Emerson Process Management
Blegistrasse 23
P.O. Box 1046
CH 6341 Baar
Switzerland
Tel +41 (0) 41 768 6111
Fax +41 (0) 41 768 6300

Emerson FZE
P.O. Box 17033
Jebel Ali Free Zone
Dubai UAE
Tel +971 4 811 8100
Fax +971 4 886 5465

**Emerson Process Management Asia Pacific
Pte Ltd**
1 Pandan Crescent
Singapore 128461
Tel +65 6777 8211
Fax +65 6777 0947
Service Support Hotline : +65 6770 8711
Email : Enquiries@AP.EmersonProcess.com



EMERSON™
Process Management