



The E-Chart 100 is a field mounted flow computer for custody or non-custody transfer measurements. It is a single bi-directional meter run computer that can be used in gas or liquid applications. Multiple primary elements and density equations are supported. A unique graphical interface allows users to have up to three trend screens with two user selectable parameters per screen. This mimics a chart recorder display and allows users the ability to get at-a-glance information concerning their flow conditions.

The E-Chart 100 is designed to meet the needs of our clients throughout all sectors of the oil and gas industry. After listening to and understanding the needs of our clients, Dynamic Flow Computers designed the E-Chart 100 with a focus on reducing spare parts requirements, reducing the “learning curve” for new users, and an overall reduction in the time and cost of its implementation. Because of this foresight in design we are confident that the E-Chart 100 flow computer will exceed all of your expectations.

The E-Chart 100 calculates all the necessary standard equations (AGA, API, ISO, NIST, etc.) for liquids & gases. Monthly, daily, or hourly reports are stored in flash memory. If you include the E-Chart 100's impressively low power consumption, battery back-up capabilities, solar power options, and built-in wireless communications the E-Chart 100 proves itself to be the number one flow computer for all applications.



Features

- Low operating power (0.3 watts)
- 0.075% accuracy
- 32 bit processor
- 64x128 programmable display
- Min-max charting
- Wireless radio/Modem ready
- Multiple I/O options
- Custody transfer accuracy
- Smart field I/O

Communications

- RS232 Modbus
- RS485 Modbus
- Analog and digital I/O
- Zigbee wireless radio
- FreeWave wireless radio
- Bluetooth

Applications

- Liquid and gas measurement
- Well head measurement and automation
- Custody measurement and control
- Compressor stations
- Well optimization
- PID control
- Field mounted trending
- Multiple primary elements
- Injection index testing

Reports

- Hourly
- Daily
- Monthly
- Monthly day by day
- Calibration and audit
- Data storage in years

Alternative Power

- Battery backup
- Solar power

The E-Chart 100 flow computer has the capacity to measure a single bi-directional gas or liquid measurement train. Multiple equations are included among which are AGA3/API14.3, API14.9, API 5,6, API5.7, API2540, AGA7, AGA9, API21, with more being added continuously. The E-Chart 100 accepts any type of primary element: Venturi, Annubar, Turbine, PD, Ultrasonic, V-Cone, Wedge, Vortex, etc. Additionally, it can carry out density calculations according to the following standards: API12, AGA8; 24A, B, C; NBS for steam, saturated and supersaturated steam, NBS1045 for ethylene, etc. Contact our offices or visit our website for available equation updates. It can also control pneumatic or electrical valves (on-off or variable by means of analog outputs or process PID control).

The E-Chart 100 can have up to three textual display screens with four user-selectable parameters being displayed per screen. In addition, three graphical trend screens can be displayed showing two user-selectable parameters per trend. All screens are scrolled at user-defined intervals.

The input/output assignment, flow equations, historical data storage, and other functions are carried out using Dynamic Flow Computers' DYNACOM® software. This software is Windows based, free of charge, and available for download/update at any time on our website.

DYNACOM® Software Capabilities:

- Flow computer diagnostics
- Configure inputs and outputs
- Configure PID control
- Personalize report time and content
- Configure and select the local LCD screen displayed parameters
- Reassign and customize MODBUS® registers and values
- Create and implement custom math and formulas
- Input and output calibration
- Automatic and periodic downloading of flow computer reports
- Obtain historic data for display, saving, exportation, or printing

Historic data is available in the memory of the flow computer for download or display.

Maximum Report Storage:

- Hourly reports: 1536 hours*
- Daily reports: 64 *
- Daily reports, hour by hour: 64*
- Monthly reports: 6*
- Monthly, day by day: 2 months*
- Calibration reports: 20*
- Audit reports: 100*
- Alarm reports: 100*
- Special reports: HTML, and others

*The number of reports stored can vary according to application.

PHYSICAL SPECIFICATIONS

Electrical/Conduit Connections:	Two 3/4" NPT One 1" NPT
Housing (Flow Computer):	Material: copper free aluminum Painting: epoxy or polyurethane. Classification: NEMA 4X class 1 div. 1 – IP66
Display:	Text - 8 lines x 16 characters Graphics – 64 x 128 pixels
Terminal Blocks:	Easily accessible; removable for easy connection
Certifications:	CSA for class 1, div. 1, groups B, C and D UL for class I, zone 1, AEx d IIB+H2
Temperature Limits:	Operation: -40 to 185 °F (-40 to 85 °C) Storage: -50 to 190 °F (-46 to 87 °C)
Humidity:	100%

ELECTRICAL SPECIFICATIONS

Voltage	7 to 24 VDC
Power Consumption	0.3 watt
Temperature	-40 to 185 °F (-40 to 85 °C)
Humidity	100%
Solar Board (Optional)	10/20 watts, 12 volts
UPS (Optional)	7 day operation
Polarity	Reverse polarity protected
Processor	32 bits @ 16.7Mhz
Flash ROM	4 MB @ 70 Nano Seconds
RAM	2 MB @ 70 Nano Seconds
Real Time Clock	Years/Months/Days/Hours/Minutes
Internal Battery	Lithium ion

INPUT SPECIFICATIONS

Optic Isolation	Each input is optically isolated with ± 250 VDC chassis isolation
Digital/Switch/Frequency Input	One input 5-28 VDC 0.25Amp rating For frequency input - square wave only Frequency range 0 - 6000 HZ Signal must be > 3 volts

OUTPUT SPECIFICATIONS

Optic Isolation	Each output is optically isolated with ± 250 VDC chassis/ground isolation
Digital/Switch/Pulse Output	Two outputs 5-28 VDC 0.25Amp rating On/Off or pulses (to 125 pulses/sec.)
Analog Output	One output (16 bit) 4-20mA (external power required) For PID control or for data transmission

COMMUNICATION SPECIFICATIONS

RS232/485	Quantity 1 @ 1200 – 19200 bps
RS232 (w/ Elbow Option)	Quantity 1 @ 1200 – 19200 bps
Protocol	MODBUS® RTU/ASCII
Optional	Modem, Radio, Bluetooth

DIAGNOSTIC SPECIFICATIONS

Monitor/Alarm	Multivariable: P, DP, T Analog inputs/outputs Digital/switch inputs Digital/switch outputs Pulse/frequency inputs Internal temperature Battery voltage Internal power supply
----------------------	---


FLOW COMPUTATION SPECIFICATIONS

Number of Trains:	One
Flow Calculation:	Gas or liquid
Primary Elements:	<u>Differential:</u> Orifice, V-Cone, Wedge, Annubar, Venturi, etc. <u>Pulse/Frequency:</u> Turbine, PD, Vortex, Ultrasonic, etc.
Units of Engineering:	US and Metric
Base Conditions:	60°F, 14.7 Psia (15°C and 1 Kg./Cm ²) 68°F, 14.7 Psia (20°C and 1 Kg/Cm ²)
Equations:	AGA8 methods 1, 2, and detailed; 24A,B,C; Steam NBS Others added continuously Consult factory for complete list

```

Gross Flow/HR
  155.85 MCF
Net Flow/HR
  221.30 MCF
Mass Flow/HR
  19.41 MLB
Energy Flow/HR
  0.00 MMBTU
  
```

Text Display

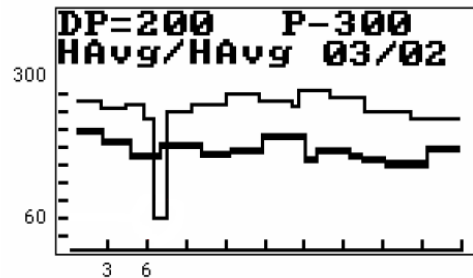

Graphic / Trend Display

Optional Accessories

Rosemount® 205 Module



SmartCone®



RS-232 Elbow



Armored RTD Cable



Back-Up Battery



Solar Panel



FreeWave Radio



Zigbee Radio



Bluetooth

